

30W Fully Integrated Synchronous Boost Converter Evaluation Board

FEATURES

Wide 2.7V-14V Input Voltage Range
 Wide 4.5V-14.6V Output Voltage Range
 13mΩ/11mΩ $R_{ds(on)}$ Internal Power MOSFETs
 Up to 12A Switch Current and Programmable Peak Current Limit
 Adjustable 200K-2.2MHz Switching Frequency:
 Selectable PFM or Forced PWM Mode
 Programmable Soft Start
 Output and Feedback Overvoltage Protection
 Thermal Shutdown Protection at 150°C
 DFN-20 3.5mmx4.5mm Package

APPLICATIONS

Bluetooth Audio
 Power Banks
 POS System
 E-Cigarette
 USB Power Delivery

DESCRIPTION

The EV12A0-B-01A Evaluation Board is designed to demonstrate the capabilities of SCT12A0, a high efficiency fully integrated synchronous boost converter. It offers a very compact solution to achieve up to 30W continuous output power over a wide input supply range. The constant off-time peak current-mode operation provides fast transient response and eases loop stabilization. The device features include over-current protection, output over voltage protection and thermal shutdown. The SCT12A0 is available in a space-saving 20-pin DFN 3.5mmx4.5mm package.

This user's guide describes the characteristics, operation and the use of the EV12A0-B-01A Evaluation Module including EVM specifications, recommended test setup, test result, schematic diagram, bill of materials, and the board layout.


EV12A0-B-01A	SCT12A0
--------------	---------

PERFORMANCE SUMMARY


Table 1. Performance

Specifications are at TA = 25°C

Input Voltage	DC up to 14V	2.7V-8.4V
Output Voltage	JP2: ON PWM	9V $\pm$ 2.5%
Output Current	Continuous DC current	3A
Frequency	Default	560KHz

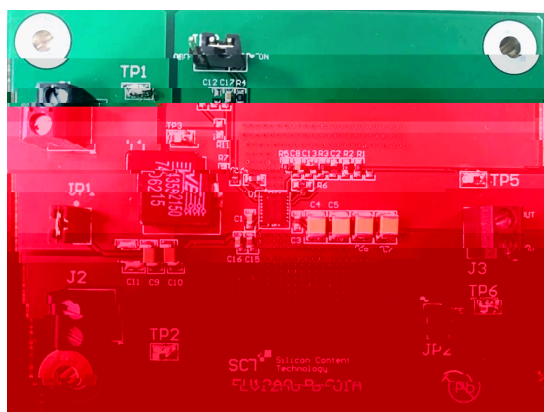

EV12A0-B-01A Evaluation Board Top View

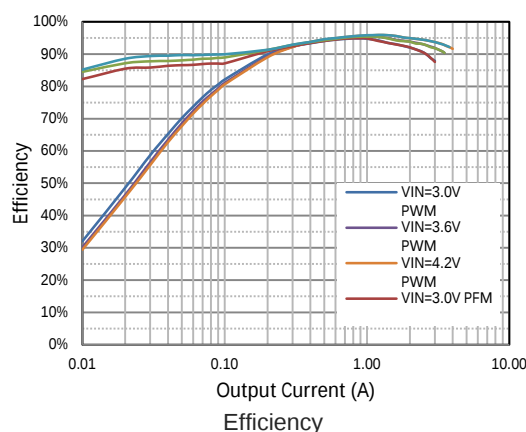

QUICK START PROCEDURE

Evaluation board EV12A0-B-01A is easy to set up to evaluate the performance of the SCT12A0. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

- Place jumpers in the following positions:
 JP1: ON Connect V_{IN} supply to V_{IN} pin of IC.
 JP2: ON Select Forced PWM mode. OFF Select PFM mode.
 JP3: ON Connect EN pin to V_{CC} to enable IC.
- With power off, connect the input power supply to J1 V_{IN} connector and J2 GND connector. Turn on the power at the input. Make sure that the input voltage does not exceed 14V, and supports sufficient current limit.
- Check the output voltage at J3. The output voltage should be 9V typical. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, output voltage ripple, efficiency and other parameters.
- To use the enable function, apply a digital input to the EN pin of JP3.

NOTE.

When measuring the voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across relevant capacitor of V_{IN} or V_{OUT} . See Figure 2 for proper scope probe technique.

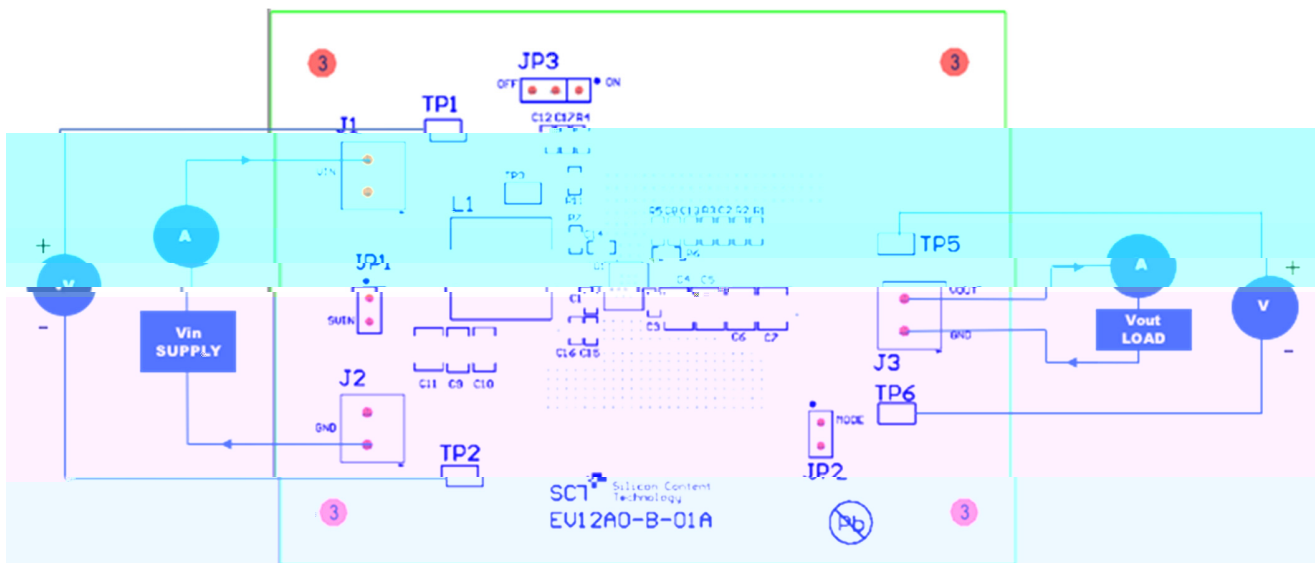


Figure 1. Proper Supply, Load and Measurement Equipment Setup

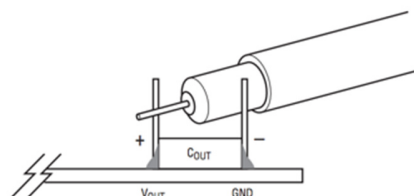
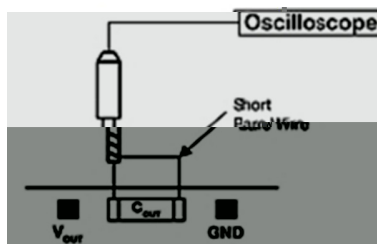


Figure 2. Measuring Voltage Ripple Across Terminals or Directly Across Ceramic Capacitor

SCHEMATIC DIAGRAM

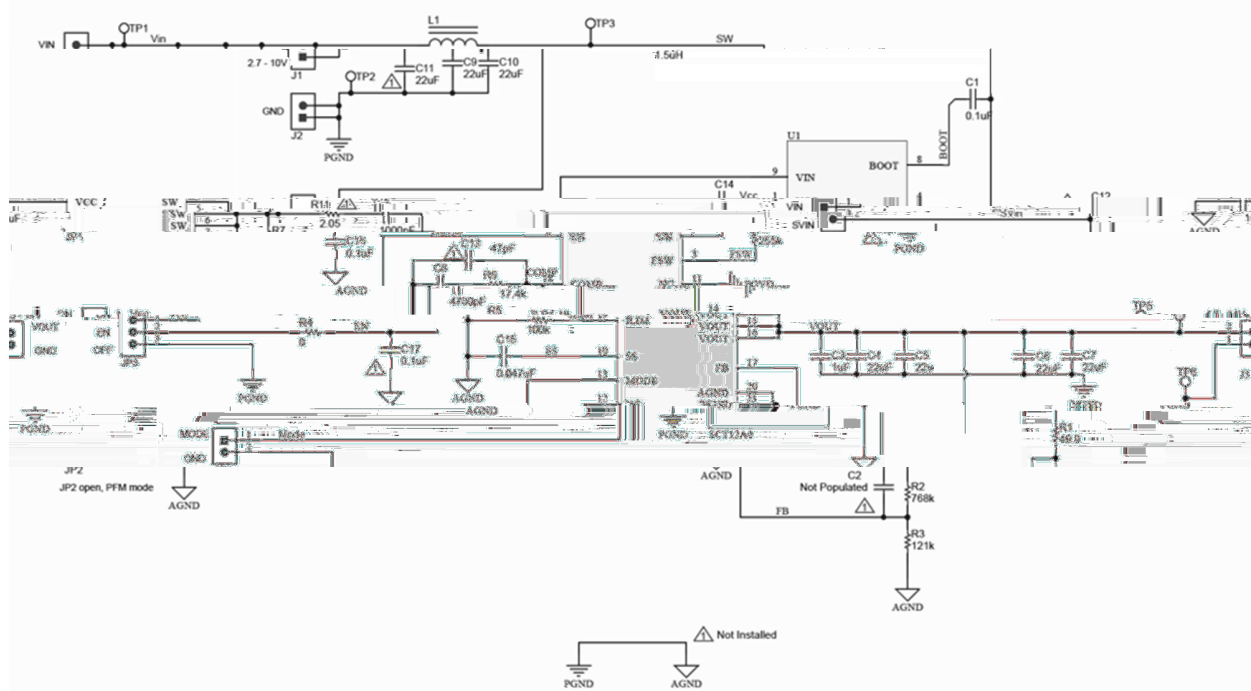


Figure 3. Evaluation Board Schematic

BILL OF MATERIALS

Table 2. Bills of Materials

Part Number	Manufacturer	Part Name	Quantity
SCT12A0	SCT	U1	1
61300211121	Wurth Elektronik	JP1, JP2, JP3	3
691 214 110 002S	Wurth Elektronik	J1, J2, J3	3
885 012 206 071	Wurth Elektronik	C1, C16, C17	3
885 012 206 063	Wurth Elektronik	C8	1
C0603C105K8PACTU	Wurth Elektronik	C14	1
885012109014	Wurth Elektronik	C4, C5, C6, C7	4
885012108018	Wurth Elektronik	C9, C10	2
C0603C105K3PACTU	Wurth Elektronik	C3	1
GRM1885C1H470JA01D	Murata	C13	Not Installed
GRM188R71H102KA01D	Murata	C11	Not Installed
GRM188R71H102KA01D	Murata	C2	Not Installed
GRM188R71H473KA61D	Murata	C15	1
7443552150	Wurth Elektronik	L1	1
CRCW0603768KFKEA	Vishay	R2	1
CRCW0603255KFKEA	Vishay	R7	1
CRCW0603121KFKEA	Vishay	R3	1
CRCW0603100KFKEA	Vishay	R5	1
CRCW060349R9FKEA	Vishay	R1	1
CRCW060317K4FKEA	Vishay	R6	1
CRCW06032R05FKEA	Vishay	R11	Not Installed
CRCW0603000Z0EA	Vishay	R4	1
5015	Keystone	TP1, TP2, TP3, TP5, TP6	5
-	-	C12	Not Installed

PRINTED CIRCUIT BOARD LAYOUT

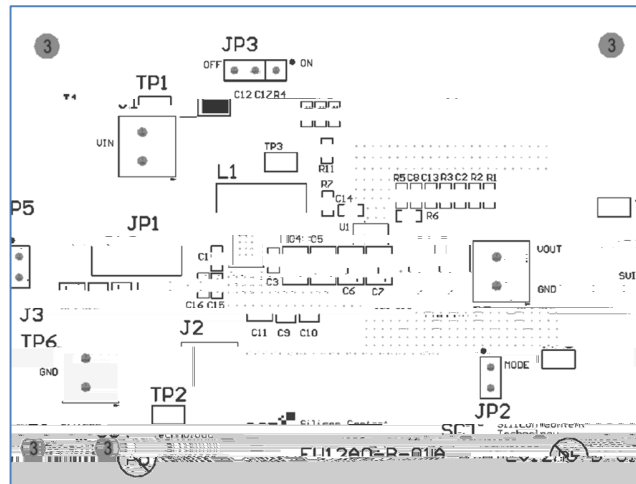


Figure 4. Top Silkscreen Layer

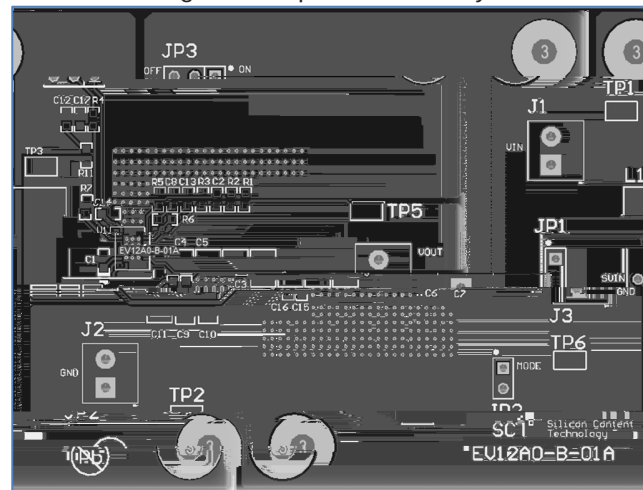


Figure 5. Top Layer

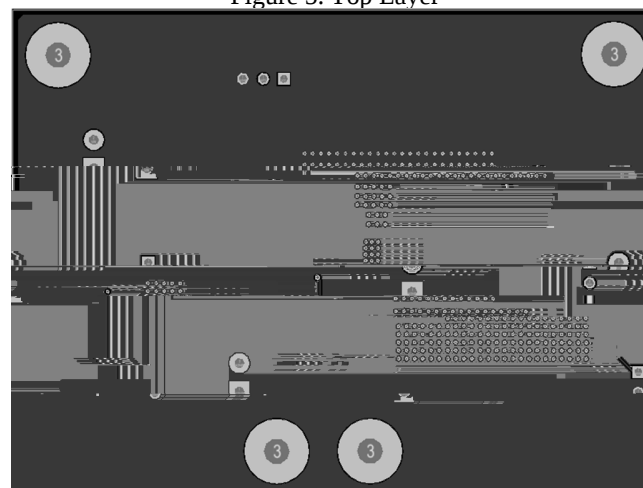


Figure 6: Bottom Layer

EVB TEST RESULTS

$V_{in}=3.6V$, $V_{out}=9V$, unless otherwise noted

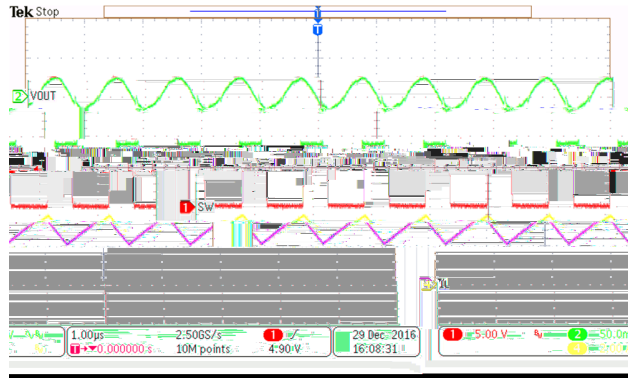


Figure 6. Output Ripple in PWM

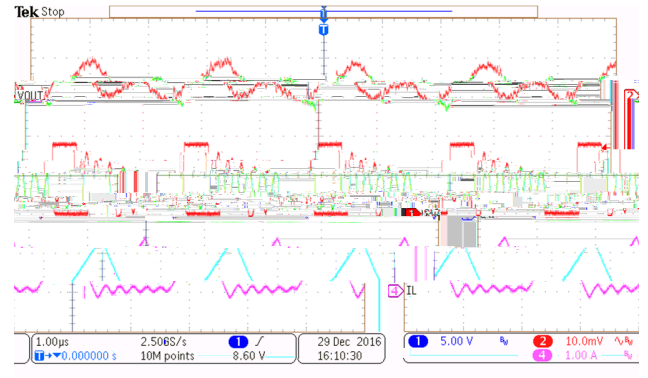


Figure 7. Output Ripple in DCM

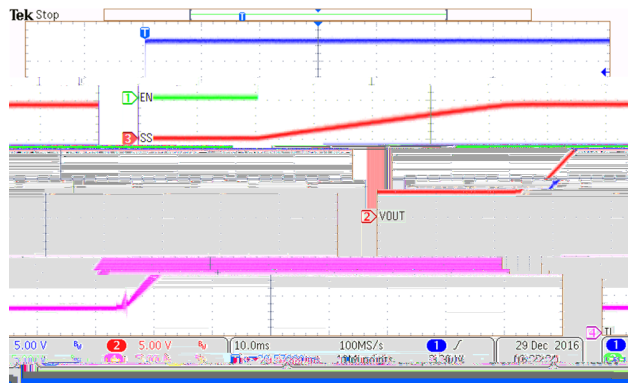


Figure 8. Power Up

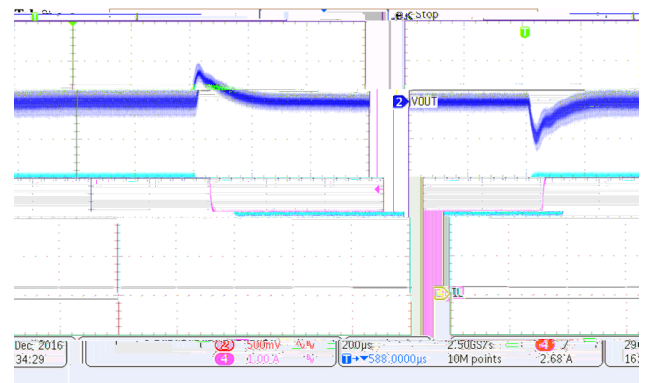


Figure 9. Load Transient ($I_{out}=2A$ to $3A$, $SR=250mA/us$)

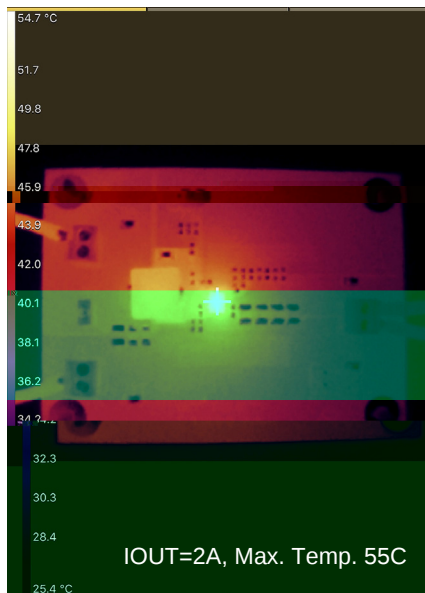


Figure 10. Infrared Thermal Image, $I_{out}=2A$

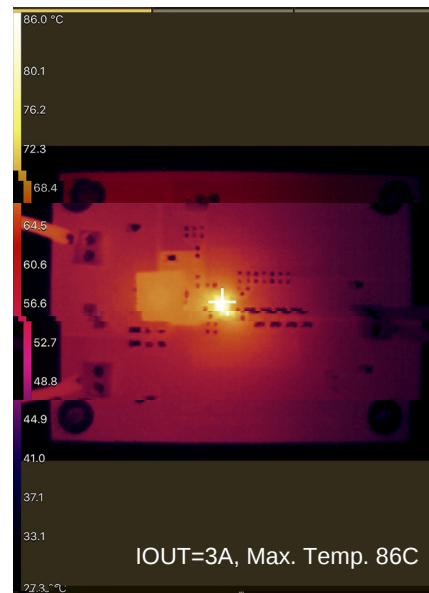


Figure 11. Infrared Thermal Image, $I_{out}=3A$

OPTIONAL MODIFICATION

The resistor connected from FSW to SW R7 (Default 255KΩ) sets switching frequency of the converter. Use equation 1 to set a desired frequency.

$$R_{FSW} = \frac{1}{f_{SW} \cdot C_{FREQ}} \quad (1)$$

where:

f_{SW} is the desired switching frequency
 $T_{DELAY} = 90 \text{ ns}$
 $C_{FREQ} = 34 \text{ pF}$
 V_{IN} is the input voltage
 V_{OUT} is the output voltage

Table 3. R_{FSW} Value for Common Switching Frequencies
(Vin=3.6V, Vout=9V, Room Temperature)

Switching Frequency	R_{FSW} (KΩ)
200 KHz	768 KΩ
350 KHz	422 KΩ
520 KHz	287 KΩ
730 KHz	196 KΩ
1000 KHz	130 KΩ
2000 KHz	48.7 KΩ

The resistor R5 at ILIM pin sets default peak input current limit at 13A typical. Use equation 2 to set inductor peak current limit

$$R_{ILIM} = \frac{V_{IN}}{I_{LIM}} \quad (2)$$

where:

I_{LIM} is the peak current limit
 R_{ILIM} is the resistance of ILIM pin to ground

Table 4. R_{ILIM} Value for Inductor Peak Current
(Vin=3.6V, Vout=9V, L=1.5uH, Room Temperature)

Peak Current (A)	R_{ILIM} (KΩ)
12 A	100 KΩ
8 A	154 KΩ
6.3 A	200 KΩ
4.4 A	301 KΩ

The output voltage is set by an external resistor divider R2 and R3 in typical application schematic. The value of R2 can be calculated by equation 3. A minimum current of typical 20uA flowing through feedback resistor divider gives good accuracy and noise covering.

$$R_2 = \frac{V_{OUT} \cdot R_3}{V_{REF}} \quad (3)$$

where:

V_{REF} is the feedback reference voltage,
typical 1.2V

Table 5. Feedback Resistor R_3 R_4 Value for Output Voltage
(Room Temperature)

Output Voltage (V)	R_3 (KΩ)	R_4 (KΩ)
5 V	187 KΩ	59 KΩ
9 V	383 KΩ	59 KΩ
12.1 V	536 KΩ	59 KΩ

This evaluation board kit being sold or provided by Silicon Content Technology is intended for use for ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY and is not provided by SCT for commercial use. As such, the evaluation board herein may not be complete in terms of required design, marketing, and/or manufacturing related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases SCT from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take all appropriate precautions regarding electrostatic discharge. Also, be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.). No License is granted under any patent right or other intellectual property whatsoever. SCT assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind. Please read the Evaluation Board user's guide prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. Common sense is encouraged. This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a SCT application engineer.

.