

E I F FG EL

I	E	E	E	G		

F HG K H E G F C HE G

Over operating free-air temperature unless otherwise noted ⁽¹⁾

E C E G G F





F E G F


(1)
(2)

G E E G


GE E G E FG F

GLC E G E FG F

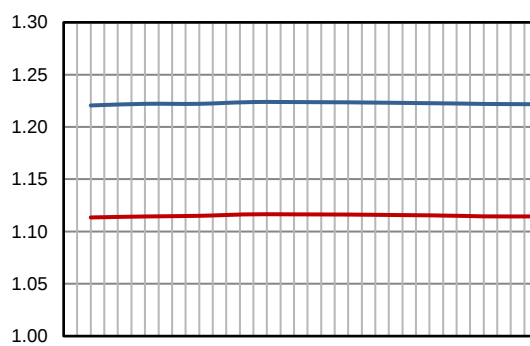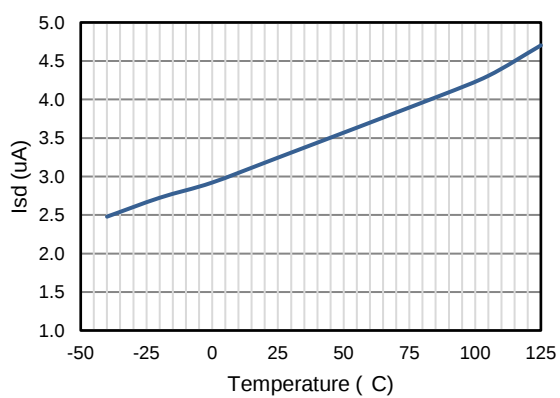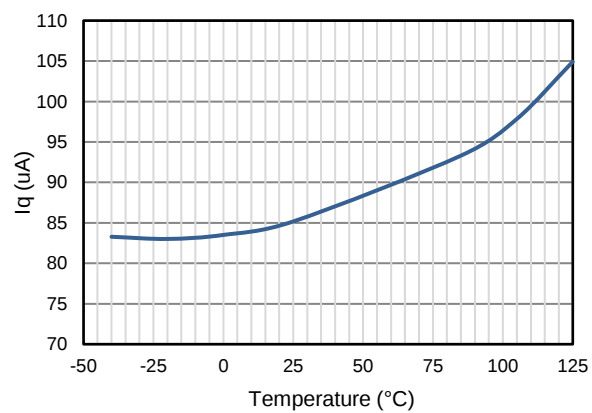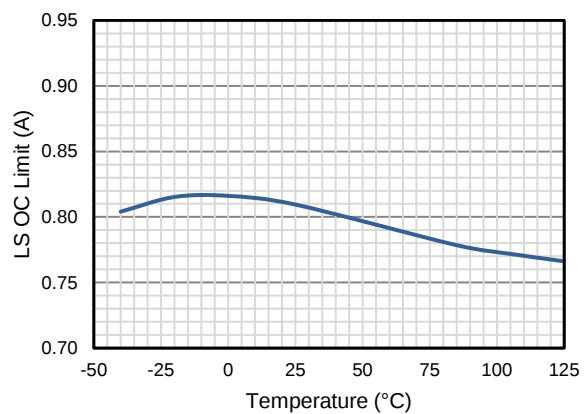

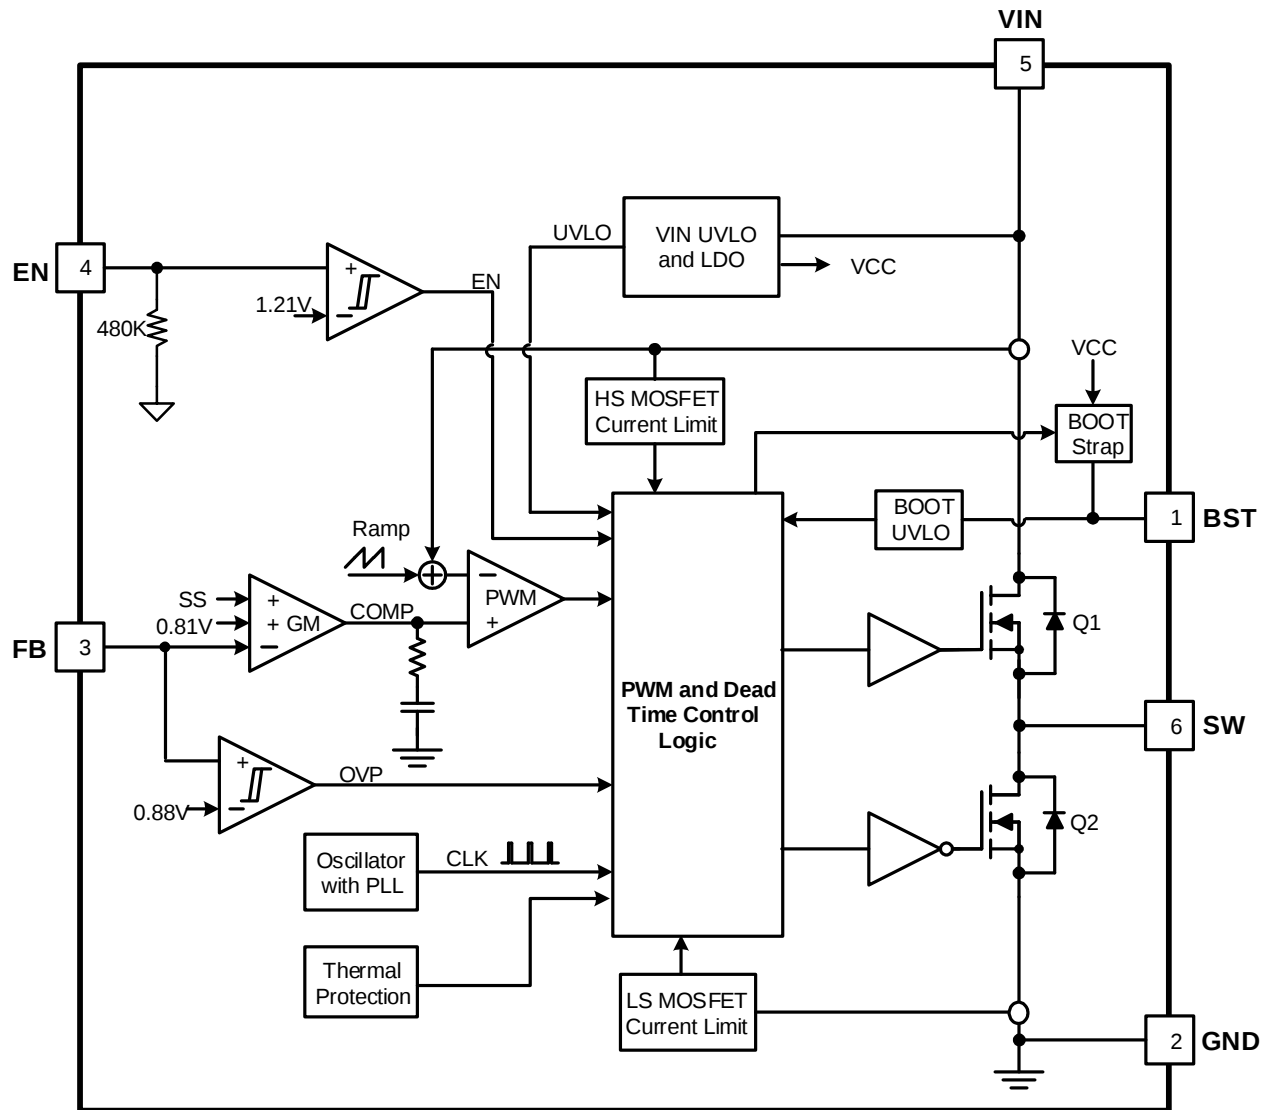

C E G


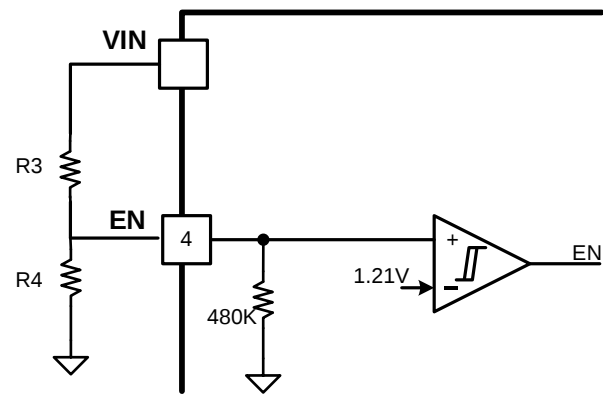


(1)

(2)

—

CC G E G

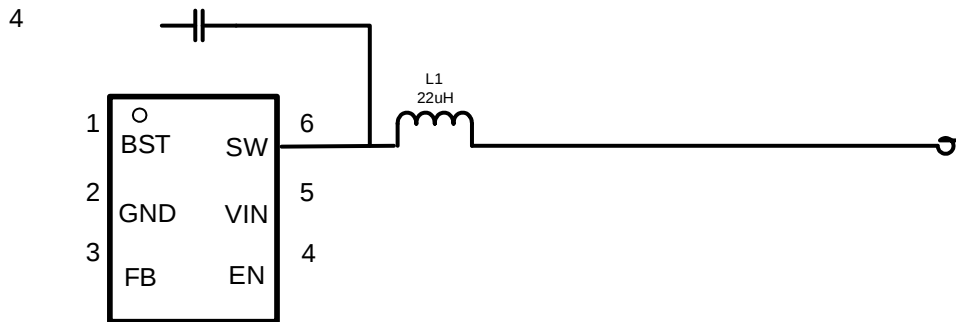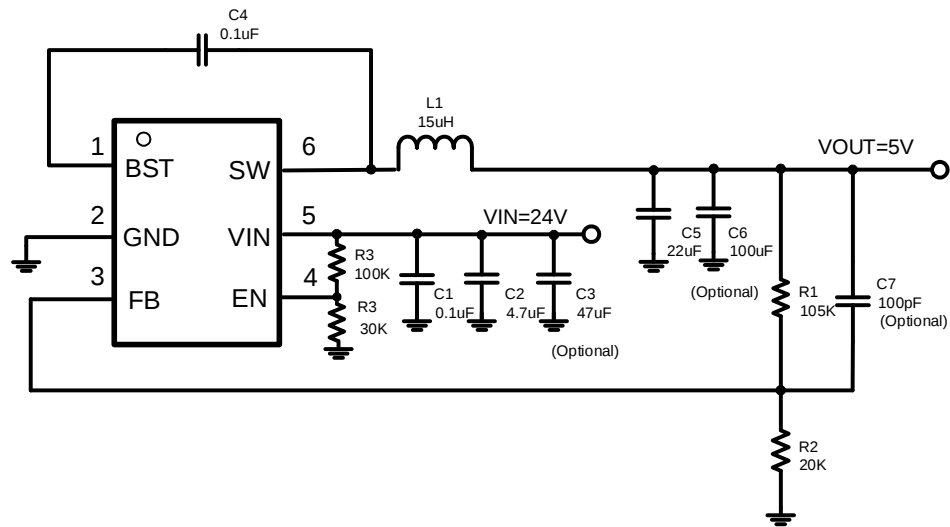

Design Parameters	Example Value
Input Voltage	24V
Output Current	0.6A
Switching Frequency	2MHz
Start Input Voltage (rising VIN)	5.5V
Stop Input Voltage (falling VIN)	5V

- 1.
- 2.
- 3.
- 4.

