

S


SCT CONFIDENTIAL

CONFIDENTIAL


SCT CONFIDENTIAL




SCT CONFIDE

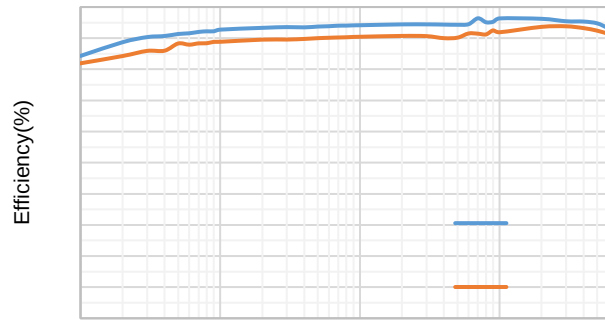


Output Current(A)

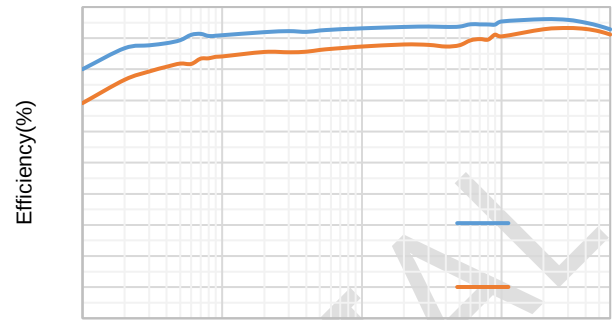


Output Current(A)

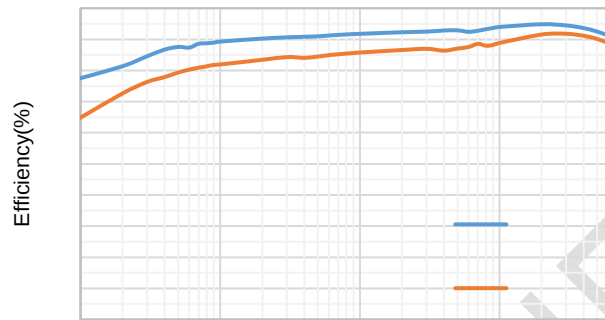


Output Current(A)

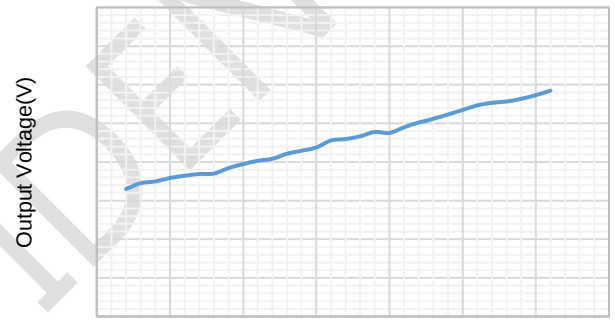

Input Voltage(V)

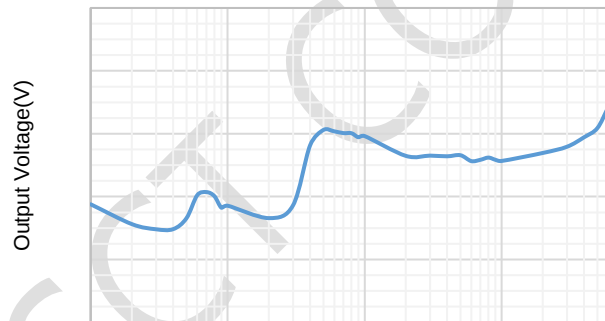


Output Current(A)

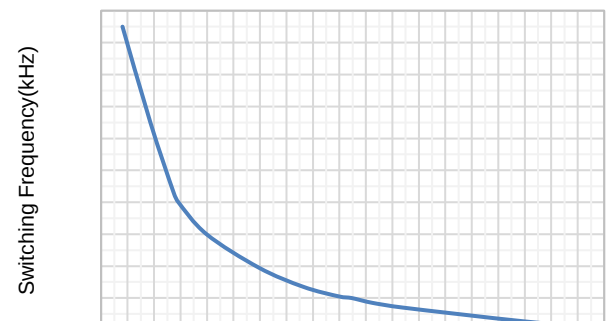


R_{FREQ}

SCT 9




SCT CONFIDENTIAL

SCT CONFIDENTIAL






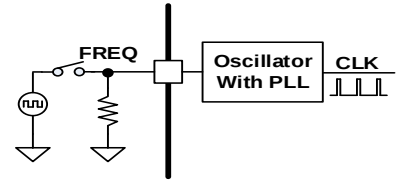


SCT CONFIDENTIAL

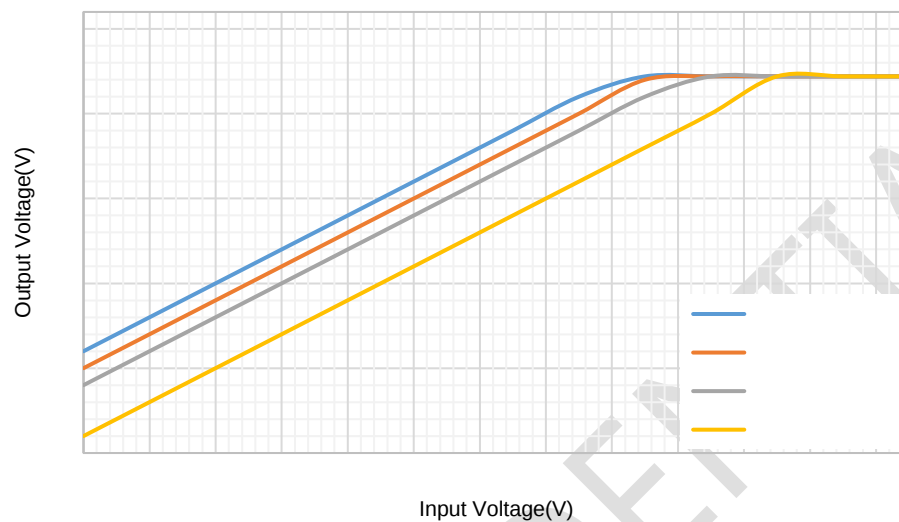

SCT CONFIDENTIAL

SCT CONF

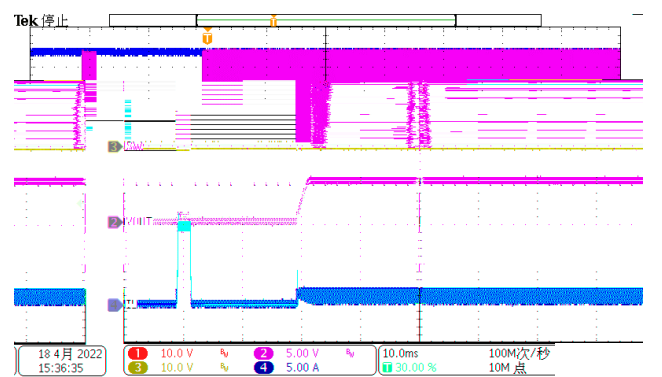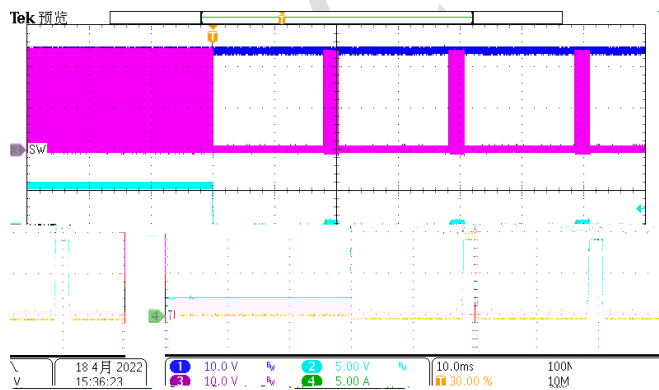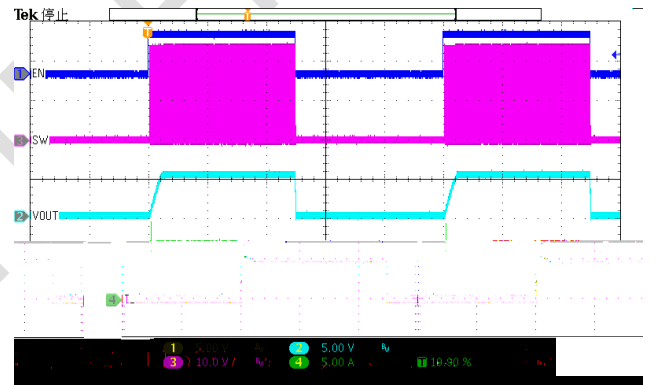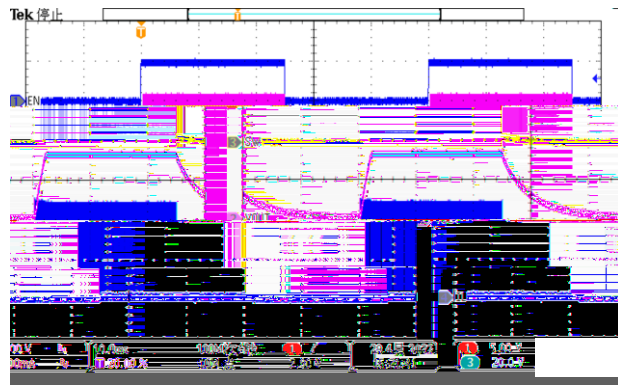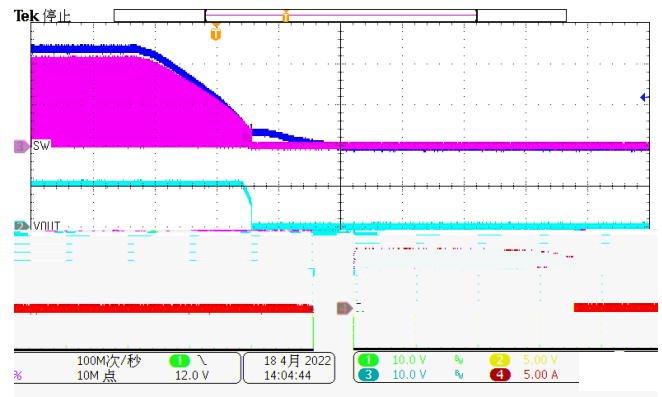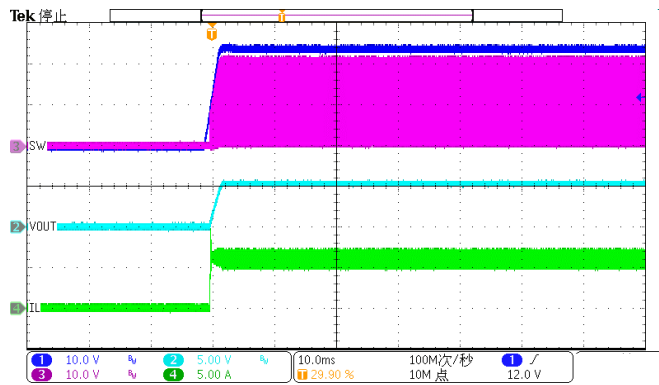





SCT CON

1.


2.

3.

4.

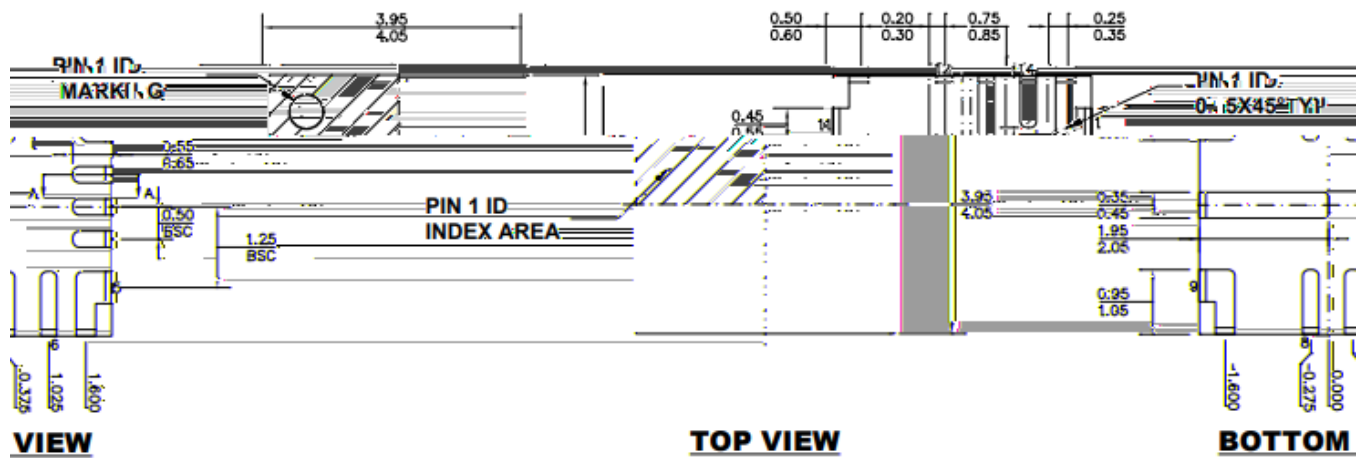


SIDE IS WETTABLE.
 SIONS ARE IN
 i.
 PADDLE SIZE DOES NOT
 .D FLASH.
 ANARITY SHALL BE 0.08
 i MAX.
 CONFIRMS TO JEDEC MO-
 S NOT TO SCALE.

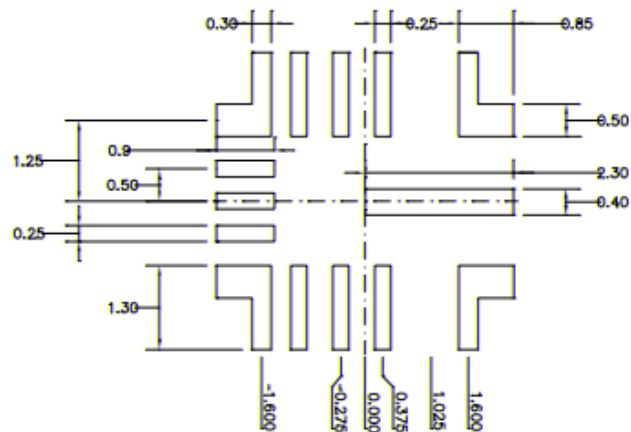

NOTE:

- 1) THE LEAD :
- 2) ALL DIMEN
- 3) EXPOSED F
- 4) LEAD COPI
- 5) DRAWING (
- 6) DRAWING I

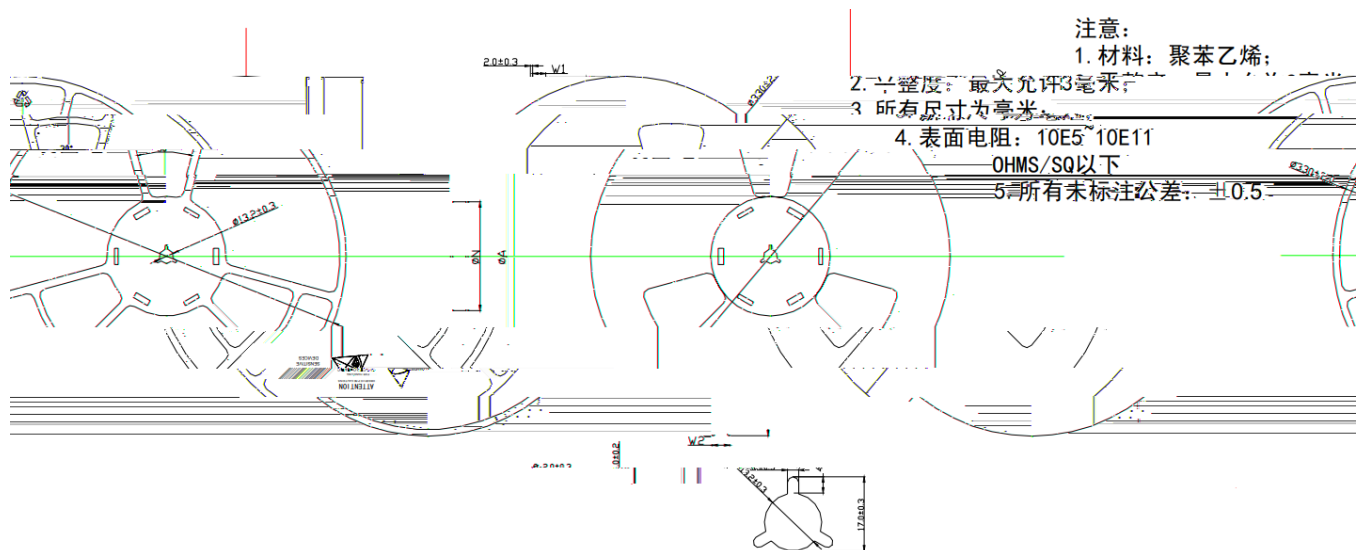

PRODUCT SPECIFICATIONS						
TYPE	WIDTH	ϕA	ϕB	W1 (Min)	W2 (Max)	
	12MM	330 ± 2.0	100 ± 1.0	12.4	19.4	
	16MM	330 ± 2.0	100 ± 1.0	16.2	23.4	
	24MM	330 ± 2.0	100 ± 1.0	24.0	31.0	
	32MM	330 ± 2.0	100 ± 1.0	32.0	39.0	
	44MM	330 ± 2.0	100 ± 1.0	44.0	51.0	

SYMBOL	A0	B0	K0	P0	P1	P2
SPEC	4.30 ± 0.10	4.30 ± 0.10	1.10 ± 0.10	4.00 ± 0.10	8.00 ± 0.10	2.00 ± 0.05
SYMBOL	T	E	F	D0	D1	F
SPEC	0.30 ± 0.05	1.75 ± 0.10	5.50 ± 0.05	1.55 ± 0.05	1.55 ± 0.10	12.00 ± 0.30

